

IGS Flow Control Valves VIM Series

Product Features


- W-seal and C-seal optional
- The wet surface is treated with EP, Max. 5µin. Ra.
- 100% Helium-leak-tested



Technical Data

Max. Working Pressure:	150 psig
Max. Working Temp:	14°F~302°F(-10°C~150°C)
Nominal Diameter:	Φ1.0
Materials	
Body:	see ordering info
Sealing:	FKM
Flow Capacity:	Cv=0.03

Dimensions (mm)

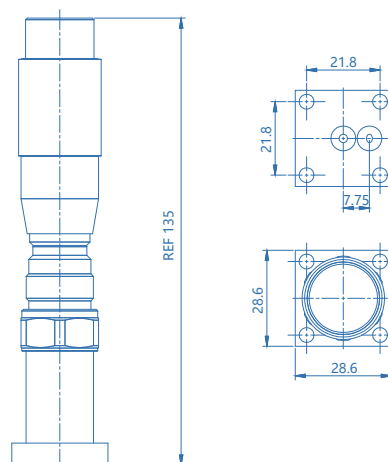

Ordering Information

VIMS - A - 2P - C 11

Materials

S: 316L EP
SLV: 316L VIM-VAR

Flow Capacity

A: Cv=0.065
B: Cv=0.03

Port Size

11: 1.125"
15: 1.5"

Port type

W: W-seal
C: C-seal

port Config

2P: 2 port
3P: 3 port

