



Product Features

- Line pressure regulator
- Stainless steel 316L body
- 4 ports configuration
- Stable outlet pressure

Typical Applications

- Pharmaceutical Industry
- Food and Beverage Industry


Dimensions (mm)

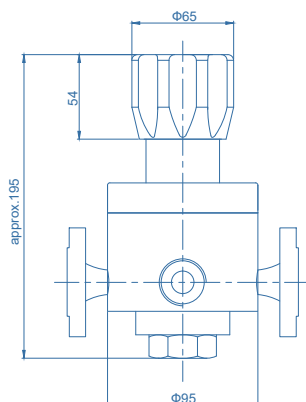


Technical Data

Type:	single-stage
Inlet pressure P1:	max. 35 bar
Outlet pressure P2:	2/3/4/8/10/20 bar
Materials	
body regulator:	see ordering info
Valve seat:	EPDM (Buna-N option)
Diaphragm:	PTFE+Neoprene
Inlets and Outlets:	see ordering info
Temperature range:	-15°C to +74°C
Leak rate:	Bubble-tight
Flow capacity:	Cv=5.1
Weight:	5.10kg

Flow Chart

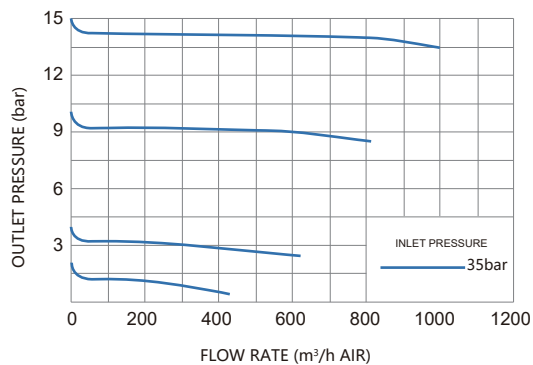


Ordering Information



Inlets / Outlets

D20: DN20 Flange F4: 1/4" NPT(F) B: Plug
D25: DN25 Flange P: Gauge (Psig/bar)

* Other connection standard, consult factory.

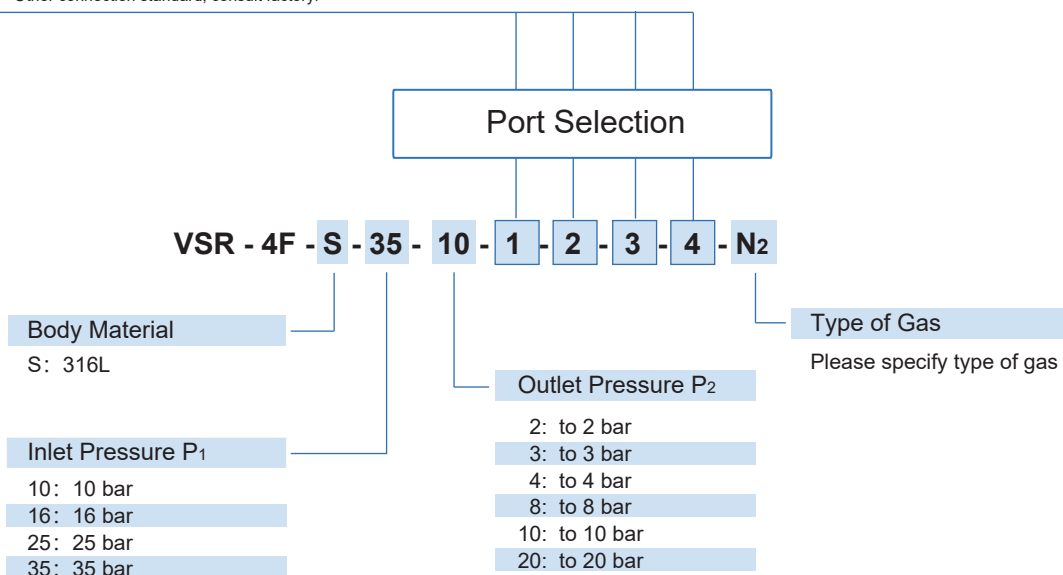

Ordering Example

Example: VSR - 4FS - 35 - 10 - D20 - B - D20 - B - N₂

1 - 2 - 3 - 4

