

Calibration Gas Regulators

VSR-15 Series

VIGOUR

Product Features


- Cylinder pressure regulator
- Brass chrome plated body or stainless steel body
- Piston type

Typical Applications


- Calibration system

Technical Data


Type:	single-stage
Inlet pressure:	max. 200 bar
Outlet pressure:	4 bar(standard) 2 bar(option)
Outlet flow settings:	see ordering info
Materials	
Body regulator:	see ordering info
Temperature range:	-20°C to +50°C
Leak rate:	Bubble-tight
Weight:	0.35 kg



Dimensions (mm)

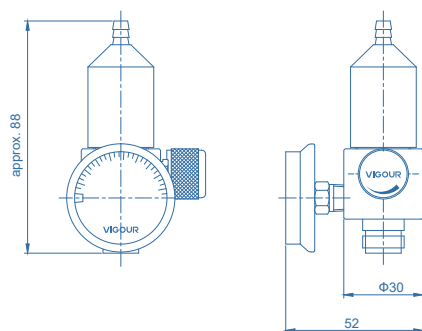

Flow Chart

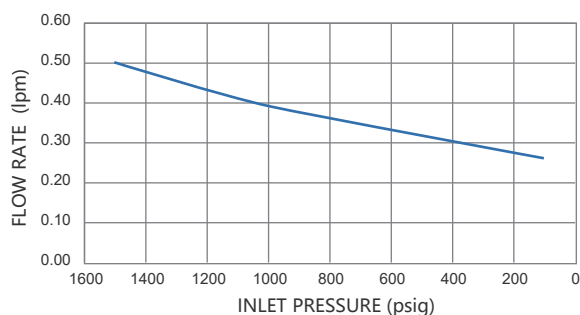

Ordering Information

VSR - 15C - 200 - 4 - 0.2 - C10 - 3/16 - W

Body Material

S: 316L

C: Chrome Plated Brass

Inlet Pressure P₁

20: 20 bar

200: 200 bar

Outlet Pressure P₂

2: 2 bar (standard)

4: 4 bar (option)

Flow Setting Type

W: Hand wheel

Outlet connection

3/16: 3/16" Hose barb

Inlet connection

C10: 5/8-18 UNF (C-10)

CGA600: CGA600

Normal Flow

0.2: 0.2 LPM 1.5: 1.5 LPM

0.3: 0.3 LPM 2.5: 2.5 LPM

0.5: 0.5 LPM 5: 5 LPM

1: 1 LPM 6: 6 LPM

