

Product Features


- Alarm unit come in 8 or 16 channel version
- For connection of 8 or 16 digital input signals such as contact pressure gauges or pressure switches suitable for transducers in accordance to NAMUR specifications
- All channels are individually programmable as normally closed or normally open contact
- Delay mode (2 sec.) is integrated for all channels
- Potential-free output RS-485
- Visible alarm
- Acooustic alarm
- Aluminum housing for wall mounting



Technical Data

| | |
|--------------------------|-------------------|
| Supply voltage: | AC220V(110V)/50Hz |
| Power consumption: | 10W |
| Input signal: | switch signal |
| Input capacity: | 8/16 channels |
| Output contact: | 2 |
| Output voltage: | DC 12V |
| Output current: | 3A |
| Communication interface: | RS-485(option) |
| Dimensions: | 240*200*70mm |

Dimensions (mm)

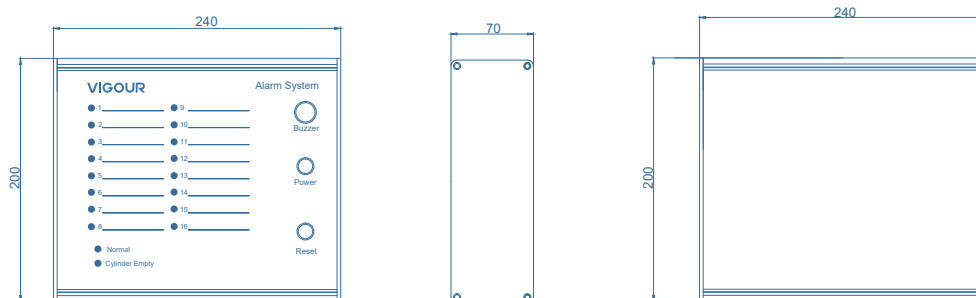

Ordering Information

VAS100 - 8 - 110 - RS

Input Capacity

8: 8 channels
16: 16 channels

communication interface

None: standard
RS: RS-485

Supply Voltage

None: AC220V
110: AC110V

