

Product Features

- · Pressure control panel with automatic change-over function
- · VSR-3 Series single-stage regulator
- Brass chrome plated body for inert, reactive, flammable and oxidizing gas and mixtures up to grade 6.0
- · Stainless steel 316L body and bonnet for corrosive gases
- · Modular design
- · Diaphragm type shut-off valves
- · Suitable for inlet pressure up to 300 bar
- · Easy installation into safety cabinet for gas cylinders
- When one side of the air source is exhausted, reverse circulation can be achieved without operation
- Tested for use with oxygen




Typical Applications

- · Component Testing
- · Calibration Systems
- · Laboratory Pressure Control
- · High Pressure Sampling Systems
- · Service & Test Equipment


Technical Data


Type:	single-stage
Inlet pressure P1:	max. 300 bar
Outlet pressure P2:	2/4/10/20/35/50 bar
Materials	
Body regulator and valves:	see ordering info
Valve seat (regulator):	PCTFE
(shut-off valve):	PCTFE
Diaphragm (regulator):	Hastelloy® C276
(valve):	Elgiloy®
O-ring:	Viton® (FKM)
(option)	Kalrez® (FFKM)
Filter:	SS 316L
Inlet connection:	1/4" NPT(F)
Outelt connection:	3/8" NPT(F)
Temperature range:	-20°C to +60°C
Leak rate (to atmosphere):	1x10 ⁻⁸ mbar I/s He
(via seat):	1x10 ⁻⁶ mbar I/s He
Weight:	6.8kg

Schematic Drawing

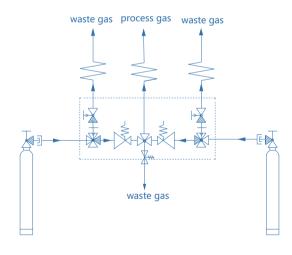

Flow Chart

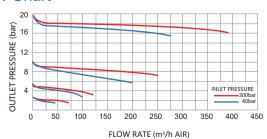

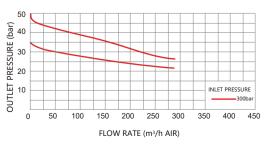









Dimensions (mm)

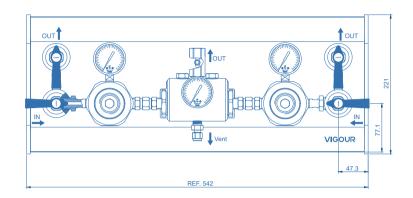



Ordering Information

