

Product Features


- VFB100 series arresters are connected in series
- Stainless steel fire stop tube with large surface structure
- Heat-sensitive on-off valves automatically cut off the air supply before the temperature reaches dangerous levels
- Configuration of one-way function to prevent the reverse flow of air to form explosive gas mixture





Technical Data

Inlet pressure:	max. 20 bar
Materials	
Body:	SS 316L
O-ring:	Viton®(FKM)
Inlets / Outlets:	see ordering info

Flow Chart

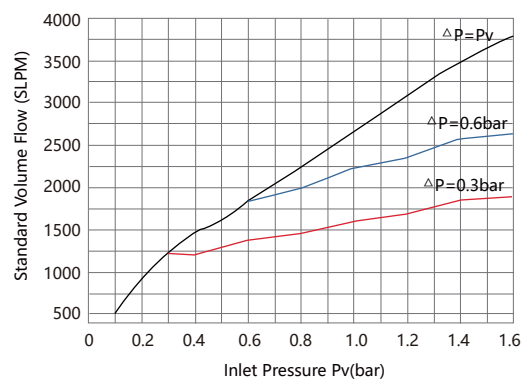

Dimensions (mm)

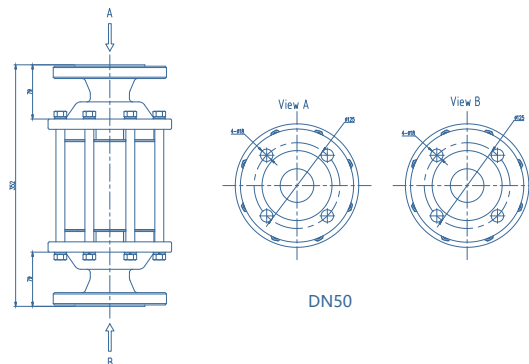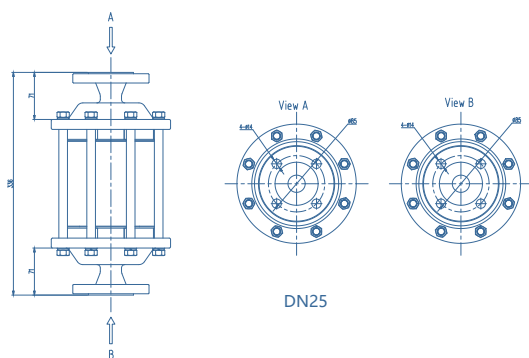

Ordering Information

VFB200 - DN25 - CV

Inlets / Outlets

DN25: DN25 Flange

DN50: DN50 Flange

* Other connection standard, consult factory.

Check Valves

CV: Includes check valve

WCV: Without check valve

