

## IGS Check Valves VICV Series

### Product Features


- C-seal
- The wet surface is treated with EP, Max. 5µin. Ra.
- Material: 316L VIM-VAR
- 100% Helium-leak-tested



### Technical Data

Max. Working Pressure:	150 psig
Max. Working Temp:	14°F~176°F(-10°C~80°C)
Surface Finish:	Max. 5µin. Ra
Cracking Pressure:	0.33 psig
<b>Materials</b>	
Body:	see ordering info
Leak Rate: (Internal)	1x10 <sup>-9</sup> mbar l/s He
(External)	1x10 <sup>-9</sup> mbar l/s He
Flow Capacity:	Cv=0.2

### Dimensions (mm)

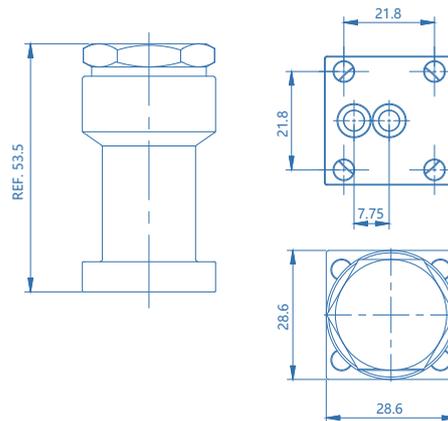

### Ordering Information

**VICV - D - 2P - C 11 - U - FF**

