


产品特点

- 金属软管柔性连接
- 内管材料可选 316L 或 PTFE 材质
- 最大进口压力: 300bar (VPS系列); 60bar (VPF系列)

示意图

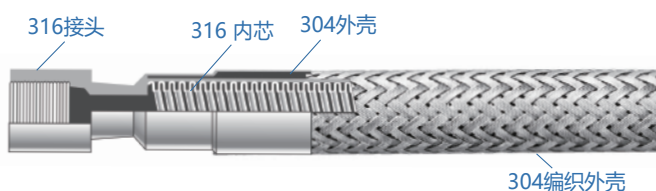

VPS 系列



VPF 系列



VPS 系列

订购参数

VPF - 1/4 - 10 - F4 - F4 - D - L

材质 F: 聚四氟乙烯 S: 316 SST	类型 空白: 不锈钢防护网 L: 不锈钢防甩绳
通径 1/4: 1/4" 1/8: 1/8"	选项 空白: 单层编织网 D: 双层编织网
长度 5: 500 mm 6: 600 mm 10: 914 mm 20: 2000 mm 30: 3000 mm 50: 5000 mm	出气连接 F4: 1/4" NPT(F) M4: 1/4" NPT(M) O4: 1/4" 卡套接头 TB4: 1/4" TUBE TB8: 1/2" TUBE
进气连接 F4: 1/4" NPT(F) CGA***: 钢瓶接头 BSP***: BSP 钢瓶接头 DIN***: DIN 钢瓶接头	

