


## Product Features

- Flexible connection of metal hose
- Inner tube material available 316L or PTFE
- Working pressure: 1/4" max. 300bar; 1/2" Max. 60bar (VPS Series);  
1/4" max. 60bar; 1/2" Max. 5bar (VPF Series)

## Schematic Drawing

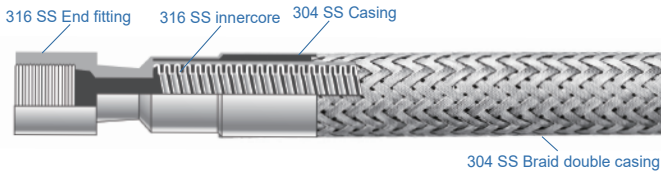

VPS Series



VPF Series



VPS Series

## Ordering Information

**VPF - 1/4 - 10 - F4 - F4 - D - L**

### Type

F: polytef  
S: 316 SST

### Orifice

1/4: 1/4"  
1/2: 1/2"

### Length

5: 500 mm  
6: 600 mm  
10: 914 mm  
20: 2000 mm  
30: 3000 mm  
50: 5000 mm

### Type

None : Stainless steel fence  
L : Stainless steel anti-swing rope

### Option

None: Single layer braided net  
D: Double woven net

### Outlet Connections

F4: 1/4"NPT(F)  
M4: 1/4"NPT(M)  
04: 1/4"Tube fitting  
TB4: 1/4" TUBE  
TB8: 1/2" TUBE

### Inlet Connections

F4: 1/4"NPT(F)  
CGA\*\*\*: Cylinder connection  
BSP\*\*\* : BSP Cylinder connection  
DIN\*\*\*: DIN Cylinder connection

