

### Product Features


- High precision
- Stainless steel construction
- Repeatability, reliability, and stability
- Anti-interference
- NC or NO contacts, easy installation
- Vibration and shock resistance



### Technical Data

|                        |                 |
|------------------------|-----------------|
| Pressure range:        | 0~25 Mpa        |
| Supply voltage:        | DC 24V / 12V    |
| Output contact:        | NO / NC         |
| Temperature:           | -20°C to +80°C  |
| Accuracy:              | 0.5% FS         |
| Ingress protection:    | IP65            |
| Connection:            | 1/4"NPT(M)      |
| Electrical connection: | Mini Hirschmann |
| Body Material:         | 304 / 316       |
| Diaphragm:             | Ceramic         |
| Junction box:          | Plastic         |

### Dimensions (mm)

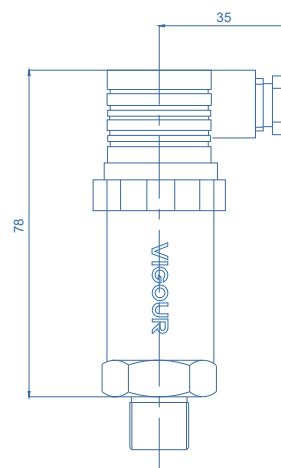

### Ordering Information

